


# Modern walls VPP80 Glas fleece precoated

Felt and tissue for installation on walls and ceilings. Provides an aesthetic look with or without pattern depending on design chosen. Enhances the surface and prevents cracking. Finish treatment with paint in desired gloss and colour.

## Product properties

Precoated quality glass felt for installation on walls and ceilings. Easy and simple installation. Mildly absorbent surface which requires primer in critical light.

- Precoated
- Uniform surface
- Prevents cracking

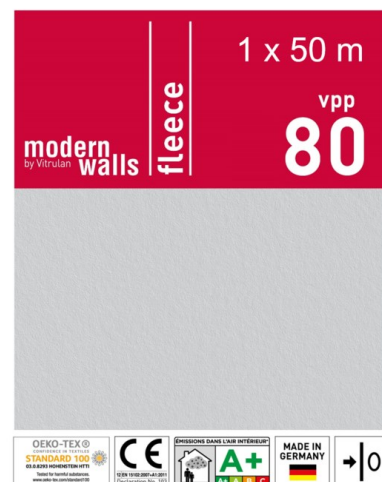

## Product use

Living rooms, hallways and entrance areas, offices, kitchens, toilets, commercial premises, clinics and shops. Not suitable for surfaces requiring wet room water- and damp-proofing. Concrete, light concrete, plaster, plasterboard and gypsum fibre board.

## Substrate

Must be clean, dry, firm and suitable for surface treatment.

## Treatment

Remove loose material and paint by cleaning and sanding. Remove existing wallpaper. Remove dirt, grime, grease and chalking materials by cleaning. Water-soluble discolouration, nicotine and soot are cleaned and treated with blocking primer. Hard, smooth substrates should be sanded to a matt finish and painted with primer. Smooth out cracks, unevenness and holes with filler. Paint absorbent and porous substrates with primer.

## Application

The glass felt panels are cut into full lengths corresponding to the surface to be covered, + 10 cm for trimming. Apply glue evenly to the contact surface, 1-2 panels at a time. Hang the panels by fitting them edge to edge or by overlapping them and trimming along the seam. Remove air bubbles using a wallpaper spatula. Cut away the excess glass felt against adjacent surfaces. Wipe off excess adhesive with a sponge and lukewarm water. Always test adhesion and result before hanging

## Expected result

Uniform, even surface. The surface may have some unevenness. Paint when wall covering surface is dry. Apply primer in critical light conditions. Intermediate sanding if necessary after the primer is dry. Finish treat with paint in desired gloss and colour. Best results reached after two coats. Avoid placing loads on the surface before the treatment is fully cured.

## Useful Information

Ensure good ventilation during and after hanging.

## Good practice

Precoated glass felt 80 g/m<sup>2</sup> Recommended adhesive: Flügger Adhesive 377 Easy

## Supplementary Info

Remove as much adhesive as possible from brushes before cleaning. Do not pour residue/remains of paint down the drain; take it to your local recycling centre. Minimise your paint waste by calculating how much paint you need in advance. Store leftover paint properly so the remains can be reused, which minimises the environmental impact.

## Technical Data

---

Cleaning of tools etc.

Water

---

Storage

Store dry and clean

---

Working temperature

Min. +10°C

---

### Current TDS Version

November 2023